


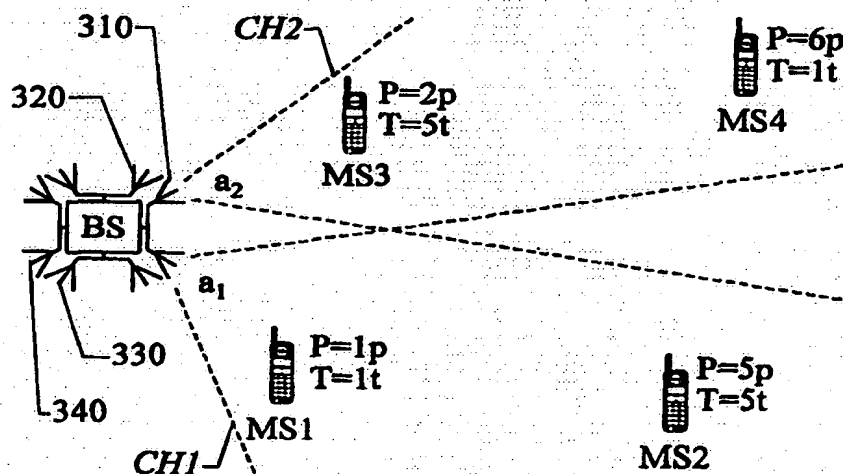

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04Q 7/38</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/33349</b> <b>(43) International Publication Date:</b> 30 July 1998 (30.07.98)
<b>(21) International Application Number:</b> PCT/SE98/00017 <b>(22) International Filing Date:</b> 9 January 1998 (09.01.98) <b>(30) Priority Data:</b> 9700246.3 28 January 1997 (28.01.97) SE <b>(71) Applicant:</b> TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). <b>(72) Inventors:</b> GRUBECK, Hans, Georg; Uppfartsvägen 5, 4trp, S-171 32 Solna (SE). BEMING, Per, Johan; Alströmergatan 32:11, S-112 47 Stockholm (SE). <b>(74) Agents:</b> NORIN, klas et al.; Ericsson Radio Systems AB, Common Patent Dept., SE - 16480 Stockholm (SE).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the          claims and to be republished in the event of the receipt of          amendments.</i>

**(54) Title:** METHOD AND ARRANGEMENT IN A RADIO COMMUNICATIONS SYSTEM**(57) Abstract**

The present invention relates to a method and an arrangement for assignment of mobile stations (MS1-MS4) to so called multi-user channels (CH1, CH2) in a radio communication system. With information on mobile stations' (MS1, MS2 and MS3, MS4 respectively) power demands (P) from a base station (BS) with which they communicate, effective time spans for transmission of information (T) and/or relevant angular power spectrum ( $a_1$ ,  $a_2$ ) from the base station (BS) channels (CH1 and CH2 respectively) are allocated in such a manner that the total energy transmitted from each base station (BS) is minimized for transmitting information to its associated mobile stations (MS1-MS4). As a consequence the total level of interference in the radio communication system to which the base stations (BS) belong will be minimal, which results in a high efficiency for the system.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**METHOD AND ARRANGEMENT IN A RADIO COMMUNICATIONS SYSTEM****FIELD OF INVENTION**

The present invention relates to a method of assigning mobile stations to radio channels in a mobile radio communications system. The radio channels are assumed to be  
5 so-called multi-user channels, in other words a plurality of mobile stations may share a channel over a given period of time.

The invention also relates to an arrangement and to a method  
10 for assigning multi-user channels to mobile stations in accordance with said method.

**BACKGROUND OF THE INVENTION**

In conventional radio communications systems for telephony, each unit is assigned its own channel with separate uplink  
15 and downlink. A given channel, represented for instance by a given time slot on a special carrier frequency, of a given base station cannot be assigned to a new mobile station before an earlier call connection on the channel has been released.

20 In the case of single-path non-selected transmission within the radio communications system, so-called broadcasting, a pool of available channels is utilized for transmitting messages with several simultaneous receivers. Many different algorithms for determining which of the available channels  
25 is most suitable for distributing this type of message have earlier been described.

U.S. Patent Specification US-A 5,530,917 teaches a method of optimizing channel utilization within a mobile telephony system. According to this method, channel assignment is effected on the basis of calculated load factors that have  
5 been obtained from at least two alternative sets of parameter values. The parameters include both radio-specific characteristics and other characteristics relevant to the call setup concerned. The method is applied both when changing channels for a call connection that has already  
10 been established and with handover.

International Patent Application WO-A1 96/07287 teaches a method of assigning carrier frequencies and time slots to mobile stations in a radio communications system of the TDMA/FDMA hybrid type (TDMA = Time Division Multiple Access.  
15 FDMA = Frequency Division Multiple Access). Mobile stations are assigned time slots on carrier frequencies such that mobile stations having roughly the same power output demand from the base station will be given the same carrier frequency. In consequence, the output power for each carrier  
20 frequency utilized is minimized and the available frequency band is used as effectively as possible. Interference in the radio communications system is also reduced.

International Patent Application WO-A1 95/07012 teaches a method in which base stations that encounter interference  
25 problems on certain of their channels are collected in a database. The base stations in the database are controlled to lower the output power on the channels concerned to a lowest value acceptable for the mobile stations that use these channels. An effort is thus made to constantly keep  
30 the number of base stations in the database as small as

possible, therewith leading to a reduction in the interference in the radio communications system as a whole.

The service GPRS within GSM enables several mobile stations to use the same channel simultaneously for the transmission of information between a given base station and the mobile stations that are connected thereto (GPRS = General Packet Radio Service; GSM = Global System for Mobile communication). Each channel includes an uplink for the transmission of information from the mobile station to the base station, and a downlink for the transmission of information from the base station to the mobile station. The simultaneous use of a channel will mean that two or more mobile stations transmit and receive information on the channel in parallel, or that two or more mobile stations use the channel alternately over a given time period either to send information to a base station or to receive information from a base station. The downlink of a channel can be used typically to transmit information to a first mobile station at the same time as a second mobile station transmits on the uplink of the channel.

The information transmitted consists typically of data packets that are divided into information blocks of specific size. By reading a USF, different mobile stations of a limited number of stations can receive different information from one and the same information block, which is transmitted via a common physical channel (USF = Uplink State Flag). A USF, which is transmitted in the payload on the downlink of a channel and read by all mobile stations that use a specific channel, indicates to which mobile station the next-arriving information block is addressed and

which mobile station may transmit information on the channel uplink in the next-arriving time slot.

GPRS pays no attention to individual communication parameters of the mobile stations when assigning a channel that is common to two or more mobile stations. The mobile station that has the highest output power requirement from the base station determines the output power level from the base station on the channel concerned. If the mobile station or the other mobile stations that share the channel places/place considerably lower output power demands on the base station, the base station will transmit with an output power that falls markedly below the minimum output power required, at least for some of the time. When mobile stations that are located on very different directional bearings, as seen from the base station, are assigned the same channel, there are essentially three different ways of making the channel available to all of these mobile stations at one and the same time. (1) A separate antenna lobe may be aimed at each mobile station; (2) an angular power spectrum that is based on information concerning both the directional bearing to the mobile station and the propagation conditions for the radio waves between the base station and the mobile station may be generated for each mobile station, and; (3) there may be used an antenna lobe that is sufficiently wide to cover all mobile stations. In all of these cases, and particularly in the latter case, electromagnetic energy will be transmitted over a wider geographical area than is necessary in order to send information from the base station to the mobile stations.

In the method described in WO-A1 95/07012, the power on channels that have already been assigned is minimized. However, the method does not address how the assignment of mobile stations to the base stations should be carried out  
5 with the view of avoiding interference in a radio communications system.

The method taught by WO-A1 96/07287 results in mobile stations that have similar output power demands being assigned different channels on the same carrier frequency.  
10 However, the method provides no solution to the problem of how a channel should be assigned to several simultaneous users of the channel. Furthermore, no account is taken of how the mobile stations are orientated in relation to the base station or to the length of time over which the mobile  
15 stations ask for channel capacity. Neither is this taken into account when optimizing channel usage as disclosed in US-A 5.530,917.

#### SUMMARY OF THE INVENTION

The present invention provides a solution to the problem of  
20 optimally assigning several simultaneous mobile stations to the channels of a base station. By optimal assignment is meant here an assignment in which the total energy transmitted in sending information from the base station to all mobile stations within its radio coverage area is  
25 minimized. One link in minimizing the energy transmitted may, for instance, be achieved by minimizing the output power on each channel from the base station.

Thus, one object of the present invention is to reduce the total interference in a radio communications system.

Another object of the invention is to optimize the extent to which the channels of a base station are utilized with respect to current communication requirements and to predicted future communications requirements.

5 According to one embodiment of the inventive method, there are registered base-station specific parameters which describe properties of mobile stations in the proximity of the base station. The parameters may denote the output power demanded by respective mobile stations of the base station, 10 the effective transmission time span for transmission of the information to be transmitted, a positional bearing relative to the base station (that is to say, the sector of the angular power spectrum of the base station in which the mobile station is located), the direction in which the 15 mobile moves and/or its speed. An algorithm in the form of, e.g., cost functions is then applied to the parameter values. A decision is then made on the basis of the result of the algorithm as to how the mobile stations in the proximity of the base station shall be assigned to the 20 channels of the base station, such that the total energy transmitted in sending information from the base station to the mobile stations is minimized. Finally, the mobile stations are assigned channels in accordance with this decision. If the available parameter values do not provide 25 sufficient basis for a precise determination of the energy required to transmit said information, this energy is, instead, predicted with the aid of available parameter values.

A method according to this embodiment of the invention has 30 the characteristic features set forth in Claim 1.



In one advantageous variant of the embodiment of the invention described above, all channels of the base station are assigned to all mobile stations within the radio coverage area at specific time intervals, in other words  
5 also to connections that have already been established between mobile stations and the base station. Assignment of mobile stations to the channels of the base station can thus be changed during the ongoing transmission of information.

In another advantageous variant of the aforesaid embodiment  
10 of the invention, a prediction is made as to which mobile stations will be located within the area covered by the base station within a specific future. This prediction is based on information relating to the speed vectors of the mobile stations, i.e. their direction and speed. Setting-up of  
15 future predicted mobile stations may include mobile stations that at that particular moment are located in adjacent cells (on their way into the cell concerned) and need not necessarily include all of the mobile stations that are located within the coverage area of the base station at that  
20 particular time (it is judged that these mobiles will leave the cell concerned within a short period of time). The prediction can also take into account access requests from respective paging messages to totally new (i.e. not earlier observed) mobile stations located within the area covered by  
25 the base station. Such predictions are based on call history, where it is assumed that new call connections can be described as stochastic processes that are Poisson-distributed, for instance.

The invention also relates to a method of assigning multi-  
30 user channels to mobile stations. The method involves

registering specific parameters that describe properties of mobile stations in the proximity of a given base station. The parameters may denote the output power demanded of respective mobile stations from the base station, the effective transmission time for the transmission of information to be transmitted, positional bearings in relation to the base station, the direction in which respective mobile stations are moving and/or their speed. In accordance with the inventive method, the mobile stations are allocated channels from the list of channels held by the base station on the basis of the values of these parameters, so as to minimize the total energy transmitted in sending information from the base station to the mobile stations.

A method according to this embodiment of the invention has the characteristic features set forth in Claim 20.

The invention also relates to an arrangement for assigning multi-user channels to mobile stations. The arrangement includes a control unit which registers specific parameters that describe properties of mobile stations in the proximity of a given base station. The parameters may denote the output power demands of respective mobile stations on respective channels from the base station, the effective transmission time span for the transmission of the information to be transmitted, positional bearings in relation to the base station, position, changes in registered power, changes in output power demands from the base station, direction of movement and/or speed. The arrangement allocates channels from the list of channels held by the base station to the mobile stations in

accordance with the inventive method and on the basis of the values of these parameters.

An arrangement according to this embodiment of the invention has the characteristic features set forth in Claim 24.

- 5 According to one advantageous embodiment of the invention, the arrangement includes a control unit which generates state flags which for each channel and time frame indicate which mobile station is authorized to send information to the base station.
- 10 The invention is effective in minimizing the total energy transmitted from base stations when sending information to associated mobile stations. Since the energy transmitted is equivalent to the sum of the output power during the effective transmission time span, the average
- 15 electromagnetic power transmitted will be minimized and the total interference in the radio communications system therewith also reduced. This enables each available channel in the system to be utilized in the most effective manner possible, which, in turn, imparts a high degree of
- 20 efficiency to the radio communications system as a whole.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows how mobile stations in the vicinity of a base station are allocated channels from its list of channels in accordance with the value of a power parameter.

- 25 Figure 2 shows how mobile stations in the vicinity of a base station are allocated channels from its list of channels in accordance with the value of a power parameter and a time parameter.

Figure 3 shows how mobile stations in the vicinity of a base station are allocated channels from its list of channels in accordance with the value of a power parameter, a time parameter and an angular parameter.

- 5 Figure 4 shows how mobile stations in the vicinity of a base station are allocated channels from its list of channels in accordance with the value of a power parameter and an angular parameter.

Figure 5 illustrates movement of mobile stations in a cell  
10 structure within a radio communications system.

Figure 6a, b are diagrammatic illustrations of how mobile stations are allocated a first and a second channel respectively.

Figure 7 is a diagrammatic illustration of how the mobile  
15 stations in Figures 6a and 6b are allocated one and the same channel.

Figure 8 is a flowchart illustrating one embodiment of the inventive method.

Figure 9 is a graphic illustration of how three mobile  
20 stations share a logic channel during a given time span.

Figure 10 illustrates an embodiment of the inventive arrangement.

The invention will now be describe din more detail with  
reference to preferred embodiments thereof and with  
25 reference to the accompanying drawings.

**DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

Figure 1 shows mobile stations MS1-MS4 in the proximity of a base station BS. All of the mobile stations MS1-MS4 are assumed to be located within the area covered by the base station BS. A first mobile station MS1 indicates that its power requirement  $P$  from the base station BS is very low, let us say  $1p$  (where  $p$  is a power unit, e.g. Watt, kilowatt or some corresponding unit). A second mobile station MS2 indicates with a power parameter value of  $5p$  that it requires a relatively high output power from the base station BS. A third mobile station MS3 and a fourth mobile station MS4 have a respective output power requirement or demand  $P$  of  $2p$  and  $6p$  from the base station BS.

The base station BS must adapt the output power of each channel, i.e. the downlink, to that mobile station that at present receives information on the channel whose output power demand is highest. Consequently, if it is desired to minimize the total power transmitted from the base station BS, it is desirable to collect mobile stations that have a high output power demand on certain channels and mobile stations that have a lower output power demand on other channels. Seen generally, mobile stations that have similar output power demands should be allocated the same channel as far as possible. Such allocation can be achieved with the aid of a so-called cost function, which for each combination of mobile stations on the available channels delivers a cost value  $\Psi(P)$  that indicates the level of favourability of the combination concerned from an output power aspect. Providing that the number of mobile stations MS1-MS4 is an even number  $2N$ , that two mobile stations  $MSn_k$  and  $MSm_k$  are assigned to

each channel, and that the output power demand  $P$  of a given mobile station is channel-independent, then

$$\Psi(P) = \sum_{k=1}^{2N} \tilde{P}_{n_k, m_k}$$

where

$$5 \quad \tilde{P}_{n_k, m_k} = \begin{cases} P_{n_k, m_k} & , \text{ where } n_k \neq m_k \text{ and } n_k, m_k \neq n_1, m_1, \text{ where } n_k, m_k = 1, \dots, 2N \text{ and } l=1, \dots, k-1 \text{ and } N \in \mathbb{Z}^+ \\ 0 & \text{otherwise} \end{cases}$$

where IF  $P_{n_k} \geq P_{m_k}$  THEN  $P_{n_k, m_k} = P_{n_k}$

ELSE  $P_{n_k, m_k} = P_{m_k}$

a cost function that gives the cost values  $\Psi(P)$  for combinations of mobile stations  $MS_{n_k}$  and  $MS_{m_k}$  that have a  $P_{n_k}$  and  $P_{m_k}$  respectively and where  $P_{n_k, m_k}$  is the output power required to transmit information to the mobile stations  $MS_{n_k}$  and  $MS_{m_k}$ .

When the first mobile station MS1 and the second mobile station MS2 are assigned to a first channel CH1, and the  
15 third mobile station MS3 and the fourth mobile station MS4 are assigned to a second channel CH2, the cost value  $\Psi(P) = 5p + 6p = 11p$  is obtained.

On the other hand, if the first mobile station MS1 and the third mobile station MS3 are assigned to the first channel  
20 CH1 and the second mobile station MS2 and the fourth mobile station MS4 are assigned to the second channel CH2, the corresponding cost value  $\Psi(P) = 2p + 6p = 8p$ .

The cost value for the remaining combination of the first mobile station MS1 and the fourth mobile station MS4 on the first channel CH1 and the second mobile station MS2 and the third mobile station MS3 on the second channel CH2 will be

5  $\Psi(P) = 6p + 5p = 11p.$

Thus, the first mobile station MS1 and the third mobile station MS3 should be assigned to the first channel CH1, and the second mobile station MS2 and the fourth mobile station MS4 should be assigned to the second channel CH2 (or vice

10 versa) as illustrated in Figure 1.

Figure 2 shows mobile stations MS1-MS4 which are all positioned within the coverage area of a given base station BS. A first mobile station MS1 indicates an output power requirement P from the base station BS of  $P = 1p$ . It also

15 indicates that the effective time span T for transmission of information from the base station BS to the first mobile station MS1 is  $T = 1t$  (where t is a time unit, such as seconds, milliseconds or some like time unit). Corresponding parameters for a second mobile station MS2 are  $P = 5p$  and  $T$

20  $= 5t$ , for a third mobile station MS3  $P = 2p$  and  $T = 5t$ , and for a fourth mobile station MS4  $P = 6p$  and  $T = 1t$ .

Since the time span during which power is transmitted from the base station BS is decisive for the magnitude of the total energy transmitted, it is desirable to minimize the

25 combined products between the output power demand P and effective transmission time T of respective mobile stations MS1-MS4.

Provided that the number of mobile stations MS1-MS4 is an even number  $2N$ , that two mobile stations  $MSn_k$  and  $MSm_k$  are

assigned to each channel, and that the output power demand  $P$  of a given mobile station is channel-independent, a cost function that takes into account the output power demand  $P$  of the mobile stations MS1-MS4 and also the effective transmission times  $T$  is:

$$\Psi(P, T) = \sum_{k=1}^{2N} \tilde{W}_{n_k, m_k}$$

where

$$\tilde{W}_{n_k, m_k} = \begin{cases} W_{n_k, m_k} & , \text{ where } n_k \neq m_k \text{ and } n_k, m_k \neq n_1, m_1, \text{ where } n_k, m_k = 1, \dots, 2N \text{ and } l = 1, \dots, k-1 \text{ and } N \in \mathbb{Z}^+ \\ 0 & \text{otherwise} \end{cases}$$

where IF  $P_{n_k} \geq P_{m_k}$  THEN

10 IF  $T_{n_k} \geq T_{m_k}$  THEN  $W_{n_k, m_k} = P_{n_k} \cdot T_{n_k}$

ELSE  $W_{n_k, m_k} = P_{n_k} \cdot T_{n_k} + P_{m_k} \cdot (T_{m_k} - T_{n_k})$

ELSE

IF  $T_{m_k} \geq T_{n_k}$  THEN  $W_{n_k, m_k} = P_{m_k} \cdot T_{m_k}$

ELSE  $W_{n_k, m_k} = P_{m_k} \cdot T_{m_k} + P_{n_k} \cdot (T_{n_k} - T_{m_k})$

15 which gives the cost values  $\Psi(P, T)$  for combinations of mobile stations  $MS_{n_k}$  and  $MS_{m_k}$  with output power demands of  $P_{n_k}$  and  $P_{m_k}$  respectively, effective transmission times  $T_{n_k}$  and  $T_{m_k}$  and where  $W_{n_k, m_k}$  is the energy required to send information to the mobile stations  $MS_{n_k}$  and  $MS_{m_k}$ .

20 When the first mobile station MS1 and the second mobile station MS2 are assigned to a first channel CH1, and a third



mobile station and the fourth mobile station MS4 are assigned to a second channel CH2, the cost value  $\Psi(P,T) = 5.5\text{pt} + 6.1\text{pt} + 2 \cdot (5-1)\text{pt} = 39\text{pt}$ .

When the first mobile station MS1 and the third mobile station MS3 are assigned to the first channel CH1 and the second mobile station and the fourth mobile station MS4 are assigned to the second channel CH2, the corresponding cost value is  $\Psi(P,T) = 2.5\text{pt} + 6.1\text{pt} + 5 \cdot (5-1)\text{pt} = 36\text{pt}$ .

When the first mobile station MS1 and the fourth mobile station MS4 are, instead, assigned to the first channel CH1 and the second mobile station MS2 and the third mobile station MS3 are assigned to the second channel CH2, the cost value is  $\Psi(P,T) = 6.1\text{pt} + 5.5\text{pt} = 31\text{pt}$ .

Consequently, the first mobile station MS1 and the fourth mobile station MS4 will preferably be assigned to the first channel CH1 and the second mobile station MS2 and the third mobile station MS3 assigned to the second channel CH2, or vice versa. Figure 2 illustrates this assignment of the mobile stations MS1-MS4.

In addition to assigning mobile stations MS1-MS4 that have similar output power demands P to the same channel as far as is possible, or to assign to the same channel mobile stations MS1-MS4 whose products between output power demands P and effective transmission times T are the same, it is also suitable to assign to the same channel those mobile stations MS1-MS4 whose directional bearing A is approximately the same with respect to the base station BS. When mobile stations that are located on essentially

different directional bearings are assigned to the same channel, it is necessary for the base station BS either to use simultaneously several completely different angular power spectrums in transmission, or there must be used an antenna lobe which is sufficiently wide to cover all mobile stations. In both of these cases, electromagnetic energy will be transmitted over a wider geographical area than is necessary for transmitting information from the base station BS to the mobile stations MS1-MS4.

10 Figure 3 shows mobile stations MS1-MS4 located within the coverage range of a base station BS. In the illustrated case, the base station BS is equipped with at least one adaptive antenna 310-340, i.e. a directional sensitive antenna by means of which the base station BS is able to  
15 determine which configuration of the angular power spectrum A is relevant to mobile stations in the vicinity of the base station BS or at least in which directional bearing A relative to the base station BS a given mobile station is positioned.

20 A first mobile station MS1 positioned within a first sector  $a_1$  of a first adaptive antenna 310 of the base station BS has an output power demand P from the base station BS of  $1p$ , and an effective transmission time span T of  $1t$ . Corresponding parameters  $A = a_1$ ,  $P = 1p$  and  $T = 1t$  for a  
25 second mobile station MS2,  $A = a_2$ ,  $P = 2p$  and  $T = 5t$  for a third mobile station MS3, and  $A = a_4$ ,  $P = 6p$  and  $T = 1t$  for a fourth mobile station MS4.

A cost function that takes into account the relevant configuration of the angular power spectrum A of the base

station BS for the mobile stations MS1-MS4, the output power demand  $P$  of the mobile stations MS1-MS4, and effective transmission time spans  $T$ , provided that the number of mobile stations MS1-MS4 is an even number  $2N$ , that two  
 5 mobile stations  $MSn_k$  and  $MSm_k$  are assigned to each channel, and that the power output demand  $P$  of a given mobile station is channel-independent, is

$$\Psi(P, T, A) = \sum_{k=1}^{2N} \tilde{W}_{n_k, m_k}$$

where

$$10 \quad \tilde{W}_{n_k, m_k} = \begin{cases} W_{n_k, m_k} & , \text{ where } n_k = m_k \text{ and } n_k, m_k \neq n_1, m_1, \text{ where } n_k, m_k = 1, \dots, 2N \text{ and } l = 1, \dots, k-1 \text{ and } N \in \mathbb{Z}^+ \\ 0 & , \text{ otherwise} \end{cases}$$

where IF ( $MSn_k$  and  $MSm_k$  are positioned within the same sector  $a_i$ ) THEN

IF  $P_{n_k} \geq P_{m_k}$  THEN

IF  $T_{n_k} \geq T_{m_k}$  THEN  $W_{n_k, m_k} = P_{n_k} \cdot T_{n_k}$

15 ELSE  $W_{n_k, m_k} = P_{n_k} \cdot T_{n_k} + P_{m_k} \cdot (T_{m_k} - T_{n_k})$

ELSE

IF  $T_{m_k} \geq T_{n_k}$  THEN  $W_{n_k, m_k} = P_{m_k} \cdot T_{m_k}$

ELSE  $W_{n_k, m_k} = P_{m_k} \cdot T_{m_k} + P_{n_k} \cdot (T_{n_k} - T_{m_k})$

ELSE  $W_{n_k, m_k} = P_{n_k} \cdot T_{n_k} + P_{m_k} \cdot T_{m_k}$

20 which gives the cost values  $\Psi(P, T, A)$  combinations of mobile stations  $MSn_k$  and  $MSm_k$  that either have the same

configuration of angular power spectrum (typically located in the same sector  $A = a_i$  of the angular power spectrum of the base station BS) or have different configurations of angular power spectrum (typically located in different sectors  $A = a_i$  of the angular power spectrum of the base station BS), have respective output power demands of  $P_{n_k}$  and  $P_{m_k}$ , respective effective transmission times of  $T_{n_k}$  and  $T_{m_k}$  and where  $W_{n_k, m_k}$  is the energy required to send information to the mobile stations  $MS_{n_k}$  and  $MS_{m_k}$ .

10 When the first mobile station MS1 and the second mobile station MS2 are assigned to a first channel CH1 and the third mobile station MS3 and the fourth mobile station MS4 are assigned to a second channel CH2, the cost value  $\Psi(P, T, A) = 5.5\text{pt} + 6.1\text{pt} + 2 \cdot (5-1)\text{pt} = 39\text{pt}$  is obtained.

15 On the other hand, when the first and third mobile stations MS1 and MS3 are assigned to the first channel CH1 and the second and the fourth mobile stations MS2 and MS4 are assigned to the second channel CH2, the corresponding cost value is  $\Psi(P, T, A) = 1.1\text{pt} + 6.1\text{pt} + 5.5\text{pt} + 2.5\text{pt} = 42\text{pt}$ .

20 Finally, when the first and fourth mobile stations MS1 and MS4 are assigned to the first channel CH1 and the second and the third mobile stations MS2 and MS3 are assigned to the second channel CH2, the cost value is  $\Psi(P, T, A) = 1.1\text{pt} + 6.1\text{pt} + 5.5\text{pt} + 2.5\text{pt} = 42\text{pt}$ .

25 Thus, the first and the second mobile stations MS1 and MS2 should preferably be assigned to the first channel CH1 and the third and fourth mobile stations MS3 and MS4 assigned to

the second channel CH2, or vice versa. Figure 3 illustrates this assignment of the mobile stations MS1-MS4.

When the effective transmission time spans for the information that will be transmitted from a given base station to mobile stations within its coverage area are not known, the present invention provides an optimization that minimizes the energy that the base station is expected to transmit, on the basis of other available parameters. This optimization can be made by assuming that the effective transmission times will be of long duration and equally as long for all mobile stations. Minimization of energy transmitted from the base station will then be the same as minimizing the power transmitted from the base station and therewith minimizing the energy transmission.

Figure 4 illustrates mobile stations MS1-MS4 in the vicinity of a base station BS. All of these stations MS1-MS4 are assumed to be positioned within the area covered by the base station BS.

A first mobile station MS1 has a first angular power spectrum configuration by virtue of being located within a first sector  $a_1$  of an angular power spectrum of an adaptive antenna 410 of the base station BS, and has an output power demand  $P$  from the base station BS of  $1p$ . A second mobile station MS2 is located within the same sector  $a_1$  and has an output power demand  $P$  of  $5p$  from the base station BS. A third and a fourth mobile station MS3 and MS4 respectively are located within a second sector  $a_2$  of the adaptive antenna 410 and have an output power demand  $P$  from the base station of  $2p$  and  $6p$  respectively.

Provided that the number of mobile stations MS1-MS2 is an even number  $2N$ , and that two mobile stations  $MSn_k$  and  $MSm_k$  are assigned to each channel, and that the output power demand  $P$  for a given mobile station is channel-independent, a cost function that takes into account the relevant configuration of the angular power spectrum  $A$  of the base station BS for the mobile stations MS1-MS4 and the output power demand  $B$  of the mobile stations MS1-MS4 will be

$$\Psi(P, A) = \sum_{k=1}^{2N} \tilde{P}_{n_k, m_k}$$

10 where

$$\tilde{P}_{n_k, m_k} = \begin{cases} P_{n_k, m_k} & , \text{ where } n_k \neq m_k \text{ and } n_k, m_k \neq n_1, m_1, \text{ where } n_k, m_k = 1, \dots, 2N \text{ and } l = 1, \dots, k-1 \text{ and } N \in \mathbb{Z}^+ \\ 0 & \text{otherwise} \end{cases}$$

where IF ( $MSn_k$   $MSm_k$  are positioned within the same sector  $a_i$ )

THEN IF  $P_{n_k} \geq P_{m_k}$  THEN  $P_{n_k, m_k} = P_{n_k}$

ELSE  $P_{n_k, m_k} = P_{m_k}$

15 ELSE  $P_{n_k, m_k} = P_{n_k} + P_{m_k}$

which gives the cost values  $\Psi(P, A)$  for combinations of mobile stations  $MSn_k$  and  $MSm_k$  that either have the same angular power spectrum configuration  $A = a_i$  (typically located in the same sector) or different angular power spectrum configurations  $A = a_i$  (typically located in different sectors), have respective output power demands of  $P_{n_k}$  and  $P_{m_k}$  and where  $P_{n_k, m_k}$  is the power transmitted when sending information to the mobile stations  $MSn_k$  and  $MSm_k$ .

When the first and the second mobile stations MS1 and MS2 are assigned to a first channel CH1 and the third and the fourth mobile stations MS3 and MS4 are assigned to a second channel CH2, the cost value  $\Psi(P,A) = 5p + 6p = 11p$  is obtained.

When the first and the third mobile stations MS1 and MS3 are assigned to the first channel CH1 instead, and the second and the fourth mobile stations MS2 and MS4 are assigned to the second channel CH2, the corresponding cost value is  $\Psi(P,A) = 1p + 2p + 5p + 6p = 14p$ .

The cost value will be  $\Psi(P,A) = 1p + 6p + 5p + 2p = 14p$  for the remaining combination of the first and the fourth mobile stations MS1 and MS4 assigned to the first channel CH1 and the second and third mobile stations MS2 and MS3 assigned to the second channel CH2.

The first and the second mobile stations MS1 and MS2 should thus be assigned to the first channel CH1, and the third and the fourth mobile stations MS3 and MS4 should be assigned to the second channel CH2, or vice versa.

When wishing to optimize assignment of mobile stations to the available channels of a base station over a first time interval  $\tau_1$ , rather than instantaneously, from an energy aspect, it is also necessary to take into account those mobile stations that are correctly located within the area covered by adjacent base stations but which are expected to communicate with the base station concerned within the first time interval  $\tau_1$ . Figure 5 illustrates mobile stations MSX1-MSX5 that are located within the coverage areas of base

stations BSX1-BSX6 that are represented by cells C1-C6 adjacent to a cell C that corresponds to the coverage area of a given base station BS. Two mobile stations MSY1 and MSY2 are also located within the coverage area C of the base station BS, these mobile stations representing mobile stations MSY1, MSY2 that are expected to commence communication within the base station BS within a second time interval  $\tau_2$ , with respect to the history of earlier call connections within the coverage area C. The assumption that such earlier unobserved mobile stations MSY1, MSY2 will either make an access request or receive a paging message within the second time period  $\tau_2$  is based on call history, where it is assumed that new calls can be described as stochastic processes of Poisson distribution, for instance.

Thus, when calculating the aforesaid cost functions  $\Psi$  for the base station BS, parameters P and/or T and/or A for those mobile stations MSX1-MSX3 and MSY1, MSY2 respectively are included, these mobile stations either having a speed  $v_{x1}$ ,  $v_{x2}$ ,  $v_{x3}$  and a direction  $d_{x1}$ ,  $d_{x2}$ ,  $d_{x3}$  which suggests that they can be expected to exchange information with the base station BS or, on probable grounds, can be expected to commence an exchange of information with the base station BS within a given time interval  $\tau$ . Data relating to speed vectors  $v_{x1-5}$ ,  $d_{x1-5}$  for possible future mobile stations MSX1-MSX5 can be obtained from Doppler shift measurements and/or extrapolation of time shift parameters (such as timing advance values, for instance) for those mobile stations MSX1-MSX5 that have been registered by base stations BSX1-BSX5 responsible for those adjacent cells in which the mobile stations MSX1-MSX5 are located at that moment.



All cost functions  $\Psi(P)$ ,  $\Psi(P,T)$ ,  $\Psi(P,T,A)$  and  $\Psi(P,A)$  described with reference to Figures 1, 2, 3 and 4 respectively presume that the transfer of information from the base station BS to the mobile stations MS1-MS4 has commenced immediately, i.e. without delay.

When a certain channel assignment delay  $\Delta T_{MAX}$  can be accepted, it is possible to further reduce the total energy transmitted from the base station. Naturally, the highest tolerated delay  $\Delta T_{MAX}$  may not exceed a value stipulated by the transmission priority of potential mobile stations.

For instance, the total energy transmitted from the base station BS in the example described with reference to Figure 2 above could be reduced from  $\Psi(P,T) = 31\text{pt}$  to  $\Psi(P,T) = 28\text{pt}$  if a maximum delay  $\Delta T_{MAX} = 5T$  could be accepted. Figure 6a is a diagrammatic illustration of how the first and fourth mobile stations MS1 and MS4 are assigned to a first channel CH1, wherewith a transmitted energy of 6pt is obtained (i.e. the area beneath maximum output power requirement). Figure 6b is a corresponding diagrammatic illustration of how the second and the third mobile stations MS2 and MS3 are assigned to a second channel CH2, therewith obtaining a transmitted energy of 25pt. All transmissions are commenced immediately at time  $T = 0t$  and take place in parallel. The total energy transmitted is  $\Psi(P,T) = 6\text{pt} + 25\text{pt} = 31\text{pt}$ .

When all mobile stations MS1-MS4 are assigned to one and the same channel CH1, the total energy transmitted from the base station BS can be further reduced. We still assume that a maximum of two mobile stations  $MSn_k$  and  $MSm_k$  can utilize the channel CH1 at each given moment in time, typically uplink

and downlink respectively. It is therefore necessary for two of the mobile stations MS3 and MS1 to wait until information transmissions from the base station BS to the two remaining mobile stations MS1 and MS4 have been completed before commencing the transmission of information to the mobile stations MS1, MS3. The lowest total energy transmission from the base station BS is obtained when the channel CH1 is allocated initially to the second mobile station MS2 and to the fourth mobile station MS4. The channel CH1 is allotted to the third mobile station MS3 at time  $T = 1t$ , and to the first mobile station MS1 at the time  $T = 5t$ . The third mobile station MS3 is thus delayed by  $\Delta T_{MS3} = 1t$  and a corresponding delay in respect of the first mobile station MS1 is  $\Delta T_{MS1} = 5t$ . This circumstance is illustrated in Figure 7, from which it will also be apparent that the total energy transmitted from the base station BS will be  $\Psi(P,T) = 6 \cdot 1pt + 5 \cdot (5-1)pt + 2 \cdot (6-5)pt = 28pt$ .

A further reduction in the energy transmitted from the base station can also be achieved when allowing the information transmissions from the base station to the mobile stations to be divided into smaller information units, for instance units in the size of data blocks. However, such division is liable to result in the summated time for transmitting the divided information units will exceed the transmission time for the original arrangement of information.

Figure 8 is a flowchart illustrating one embodiment of the inventive method in which the total energy transmitted in sending information from a given base station BS to mobile stations MS in the vicinity of said base station is minimized. In a first step 800, a check is made to ascertain

whether or not mobile stations MS are located within the area covered by the base station BS. If mobile stations are found to be present, a timer is set to zero in the next step 810, otherwise step 800 is repeated until a mobile station MS is located within the coverage area of said base station BS. The timer is started in step 820, wherewith its time parameter begins to run and parameters P and/or T and/or A in respect of all mobile stations MS in the vicinity of the base station BS and which can be expected to communicate with the base station within a determined time  $\tau$  are registered by the base station BS in step 830. Parameters P, T and A for certain mobile stations MS in cells adjacent to the cell concerned are also registered. Cost values  $\Psi_1, \Psi_2, \dots, \Psi_i$  for all  $i$  possible combinations of the mobile stations MS on the channels of the base station BS are calculated in step 840 in accordance with a cost function  $\Psi(P, T, A)$ . In the next step 850, the mobile stations MS are assigned to the channels in accordance with the combination that gave the lowest cost value  $\Psi_{\min}$  in the preceding step 840. In step 860, the mobile stations MS are assigned to said channels by, e.g., USFs being sent from the base station BS. The procedure waits in the final step 870 until the time parameter of the timer has reached a determined value  $\tau$ , whereafter the procedure returns to step 800.

25 In GSM, a TDMA frame is comprised of eight time slots numbered from zero to seven. These time slots form eight so-called physical channels. A number of TDMA frames together form a multiframe. Multiframes are used in GSM as carriers of so-called logic channels, which may be used to transmit packet data, for instance. A certain such logic channel is

30

comprised of a determined time slot in each TDMA frame on a separate carrier frequency. When data is transferred physically between a base station and a mobile station, each information block is divided into four data bursts of 5 mutually equal size, each comprising 60 information bits, for instance. When the radio communications system is a TDMA system, the data bursts can be transmitted bit-interleaved in four consecutive time slots on a time-divided channel. Figure 9 illustrates the division of a logic channel CH1 of 10 a base station divided into TDMA frames. In the illustrated example, the channel CH1 will be shared by three mobile stations MS1, MS2 and MS3 during a time span corresponding to the TDMA frames 1-32.

A first mobile station MS1 and a third mobile station MS3 15 transmit information to the base station, while a second mobile station MS2 receives information from said base station.

This information is assumed to be data that has been divided into information blocks. Each information block is assumed 20 to occupy four consecutive TDMA frames and is designated DATA#(#<sub>tot</sub>), where #(#<sub>tot</sub>) denotes the ordinal number of the information block concerned and the total number of blocks in the transmission. A numerical prefix of an information block in uplink discloses the mobile station from which the 25 block originates. Thus, 3DATA2(4) designates the second information block in a transmission of a total of four blocks from the mobile station MS3 to the base station. USF indicates the mobile station MS for which the uplink of the channel CH1 has been reserved in the next following four 30 TDMA frames and specifies R(#<sub>MS</sub>). Thus, R(1) means that the

uplink of channel CH1 is used by the first mobile station MS1 during the following four TDMA frames. When transmitting in the downlink, i.e. when transmitting information from the base station to a mobile station, address information lies in the actual information block and consequently no flag corresponding to USF is required.

Naturally, information can be divided in other ways. Similarly, corresponding frame division can be effected in a CDMA system or an FDMA system.

- 10 The aforementioned effective transmission time  $T$  for transmitting information from a base station to a specific mobile station is thus proportional to the number of information blocks  $\#_{tot}$  included in the current transmission. In the described TDMA example, the effective transmission  
15 time  $T$  is determined as  $T = 4 \cdot$  (the time of a data burst)  $\#_{tot}$ .

In the initial TDMA frames 1-4, the base station sends a USF that states R(1) that a first mobile station MS1 is authorized to send a first information block 1DATA1(3) in  
20 the next-following four TDMA frames 5-8 on the uplink of the channel CH1. The next USF, which is sent during the TDMA frames 5-8, states that R(1) the first mobile station MS1 may send a second information block 1DATA2(3) during the next-following four TDMA frames 9-12. The first mobile  
25 station MS1 sends the first information block 1DATA1(3) at the same time. During the TDMA frames 9-12, there is sent a USF that indicates that R(1) the first mobile station MS1 may continue to send information 1DATA3(3). Information DATA1(4) is sent to the second mobile station MS2 on the

downlink of the channel CH1 at the same time, and the first mobile station MS1 sends the second information block 1DATA2(3) on the downlink of the channel CH1. The USF sent during the TDMA frames 13-16 contains information to the effect that R(3) the third mobile station MS3 may begin to send information on the uplink of the channel CH1 in TDMA frame 17. The downlink information DATA2(4) during the TDMA frames 13-16 is also intended for the second mobile station MS2 and the first mobile station MS1 sends the third and the last information block 1DATA3(3) on the uplink. The content DATA3(4) of the TDMA frame 17-20 on the downlink is also intended for the second mobile station MS2. During these TDMA frames 17-20, the base station sends a USF that shows that R(3) the uplink is at the disposal of the third mobile station MS3 during the TDMA frames 21-24 for transmission of a second information block 3DATA2(4). The third mobile station MS3 sends a first information block 3DATA1(4) parallel therewith. The downlink information DATA4(4) during the TDMA frames 21-24 is also addressed to the second mobile station MS2 and the USF transmitted during the TDMA frames 21-24 states that r(3) the third mobile station MS3 can send a further data block 3DATA3(4) during the TDMA frames 25-28. The third mobile station MS3 sends a second information block 3DATA2(4) at the same time. The downlink has no information content during the time of the TDMA frames 25-28 (i.e. the downlink contains only dummy bits sent from the base station on the channel CH1) and the third mobile station MS3 sends a third information block 3DATA3(4). USF indicates in the TDMA frames 25-28 that R(3) the third mobile station MS3 may send a last information block 3DATA4(4) during the TDMA frames 29-32, while the downlink

of the channel CH1 is still empty. The terminating information block 3DATA4(4) is sent by the third mobile station MS3 during these TDMA frames 25-28.

Figure 10 illustrates an embodiment of the inventive arrangement. A control unit 1030 receives from a base station 1000 information relating to output power demand  $P$ , effective transmission times  $T$  and the relevant configuration of the angular power spectrum  $A$  for mobile stations in its vicinity. In the illustrated case, the control unit 1030 is included in a transceiver unit 1010 in the base station 1000, since the received parameters  $P$ ,  $T$  and  $A$  are found available in the transceiver unit 1010. However, it is quite feasible to place the control unit in any other desired position within or outside the base station 1000. Information concerning the relevant configuration of the angular power spectrum  $A$  of the mobile stations may conveniently be obtained with the aid of an adaptive antenna 1020. However, the information  $A$  can be generated in accordance with alternative methods with the aid of, e.g., GPS receivers in the mobile stations (GPS = Global Positioning System).

The parameter values  $MS_i(P,T,A)$  for the mobile stations  $MS_1$ - $MS_n$ , where  $i=1,\dots,n$  in the vicinity of the base station 1000 are transferred from a processor unit 1040 in the control unit 1030 and stored in a first storage unit 1050. When the parameter values  $(MS_i(P,T,A))$  for all mobile stations  $MS_1$ - $MS_n$  have been registered in the first storage unit 1050, the processor unit 1040 distributes the mobile stations  $MS_1$ - $MS_n$  over the available channels  $CH_1$ - $CH_m$  in the base station 1000 in accordance with the proposed method,

assigns each mobile station to a channel  $CH_j(MS_i)$ , where  $j=1, \dots, m$ ;  $i=1, \dots, n$  and stores the result in a second storage unit 1060 which may, of course, also consist of a second partition of the first storage unit 1050. The processor unit 1040 then generates USFs for the channels  $CH_1-CH_m$  in accordance with the channel allocation. When a predetermined time  $\tau$  has passed since the last registration of the parameter values  $MS_i(P, T, A)$  for the mobile stations  $MS_1-MS_n$ , a timer unit 1070 delivers a first signal U which causes the processor unit 1040 to perform a new collection of parameter values P, T and/or A and a new assignment of mobile stations  $MS_1-MS_n$  to the base station channels  $CH_1-CH_m$ . After having received the first signal U, the processor unit 840 sets the timer unit 1070 to zero via a second signal R, wherewith the time parameter of the time unit 870 begins again to run.



## CLAIMS

1. A method of transmitting packet data in a mobile radio communications system that includes at least one base station (BS) and a plurality of mobile stations, for  
5 assignment of mobile stations (MS1-MS4) to channels (CH1-CH2) in the transmission of information from a base station (BS) to certain mobile stations (MS1-MS4), characterized in that each of said channels (CH1, CH2) can be shared by at least two mobile stations (MS1-MS4); and in that said  
10 channel assignment takes place with a starting point from said parameters (P, T, A) in a manner such as to minimize the total transmission energy transmitted from the base station.
2. A method according to Claim 1, characterized in that  
15 said parameters (P, T, A) include a first time interval ( $\tau_1$ ) and also the parameter values ( $1p$ ,  $1t$ ,  $a_1$  and  $5p$ ,  $5t$ ,  $a_2$  respectively) for a first set of mobile stations (MS1, MS2) which will commence communication with the base station (BS) within said first time interval ( $\tau_1$ ), and the parameter  
20 values ( $2p$ ,  $5t$ ,  $a_2$ ;  $6p$ ,  $1t$ ,  $a_2$ ) for a second set of mobile stations which are already in communication with the base station (BS); and in that said assignment of mobile stations (MS1-MS4) takes place within said first and said second set.
3. A method according to Claim 1 or Claim 2, characterized  
25 by predicting the future presence of mobile stations (MSX1-MSX3) within the coverage area (C) of the base station (BS), this prediction being based on information relating to the speed ( $v_{x1}$ - $v_{x3}$ ) and the direction of movement ( $d_{x1}$ - $d_{x3}$ ) of mobile stations (MSX1-MSX5) that are in communication with

base stations (BS1-BS6) whose respective coverage areas (C1-C6) are adjacent to the coverage area (C) of said base station (BS).

4. A method according to Claim 1 or Claim 2, characterized  
5 by predicting the future presence mobile stations (MSX1-MSX3) within the coverage area (C) of said base station (BS), said prediction being based on information relating to the position and the change in measured power from mobile stations (MSX1-MSX5) that are in communication with base  
10 stations (BS1-BS6) whose respective coverage areas (C1-C6) are adjacent the coverage area (C) of said base station (BS).

5. A method according to Claim 1 or Claim 2, characterized  
by predicting the future presence of mobile stations (MSX1-  
15 MSX3) within the coverage area (C) of said base station (BS), said prediction being based on information relating to the position and the change of output power demands (P) from current base stations (BS1-BS6) of mobile stations (MSX1-MSX5) that are in communication with base stations (BS1-BS6)  
20 whose respective coverage areas (C1-C6) are adjacent to the coverage area (C) of said base station (BS).

6. A method according to any one of Claims 3-5, characterized in that said prediction also includes new mobile stations (MSY1, MSY2) that are expected to commence  
25 communication with said base station (BS) within a second time interval ( $\tau_2$ ).

7. A method according to Claim 6, characterized by compiling a list of mobile stations (MS1-MS4) located within the coverage area (C) of said base station (BS), and said

predicted future mobile stations (MSX1-MSX3, MSY1, MSY2) within the coverage area (C) of said base station (BS); and in that said parameters (P, T, A) include the parameter values ( $1p$ ,  $1t$ ,  $a_1$ ;  $5p$ ,  $5t$ ,  $a_1$ ;  $2p$ ,  $5t$ ,  $a_2$ ;  $6p$ ,  $1t$ ,  $a_2$ ) for  
5 all mobile stations (MS1-MS4, MSX1-MSX3) included in said list.

8. A method according to any one of Claims 1-7, characterized in that said parameters (P, T, A) include measured or estimated output power (P) demands (P) from said  
10 base station (BS) for each of said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) and in that the power ( $\Psi(P)$ ) transmitted from the base station (BS) is minimized for each of said channels (CH1, CH2).

9. A method according to Claim 8, characterized in that  
15 said parameters (P, T, A) include information relating to actual or estimated effective transmission time (T) for that information which each of said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) wishes to transmit; and in that said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) are  
20 assigned to said channels (CH1, CH2) such that the sum ( $\Psi(P, T)$ ) of the products between output power demands ( $P_{n_k}$ ) and effective transmission time spans (T) for respective mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) is minimized.

25 10. A method according to any one of Claims 1-9, characterized in that said parameters (P, T, A) include information relating to the relevant configuration (A) of the angular power spectrum for the radio power from said base station (BS) for each of said mobile stations (MS1-MS4,

MSX1-MSX3, MSY1, MSY2); and in that mobile stations (MS1-MS4) that have similar configurations ( $a_1, a_2$ ) of the angular power spectrum of said base station (BS) are preferably assigned to one and the same channel (CH1, CH2).

5 11. A method according to Claim 10, characterized in that mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) whose positions in relation to said base station (BS) are such as to fall within the same sector ( $a_1, a_2$ ) of the angular power spectrum of the base station (BS) are preferably assigned to  
10 one and the same channel (CH1, CH2).

12. A method according to Claim 10 or Claim 11, characterized in that the configuration ( $a_1, a_2$ ) of the angular power spectrum of the base station (BS) is determined with the aid of at least one adaptive antenna  
15 (310-340, 410).

13. A method according to any one of Claims 10-12, characterized by assigning the mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) to said channels (CH1, CH2) such as to minimize the sum ( $\Psi(P,A)$ ) of the maximum output power  
20 demands ( $P_{n_k, m_k}$ ) for utilized configurations ( $a_1, a_2$ ) of the angular power spectrum of said base station (Bs).

14. A method according to any one of Claims 10-12, characterized by assigning the mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) to said channels (CH1, CH2) such as  
25 to minimize the sum ( $\Psi(P,T,A)$ ) of the maximum products between output power demands ( $P_{n_k, P_{m_k}}$ ) and the effective transmission time spans ( $T_{n_k}, T_{m_k}$ ) of utilized configurations

( $a_1$ ,  $a_2$ ) of the angular power spectrum of said base station (BS).

15. A method according to any one of Claims 1-14, characterized by assigning one or more mobile stations in a first group (MS3, MS1) of said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) time-wise after ( $\Delta T_{MS3}$ ,  $\Delta T_{MS1}$ ) one or more mobile stations in a second group (MS2, MS4) of said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2).

16. A method according to Claim 15, characterized by commencing assignment of mobile stations from said first group (MS3, MS1) immediately upon termination of the transmission of information from the base station (BS) to at least one mobile station (MS4) in said second group (MS2, MS4).

17. A method according to Claim 15, characterized by commencing assignment of mobile stations from said first group before the transmission of information between the base station (BS) and mobile stations from said second group has been terminated.

18. A method according to any one of Claims 1-14, characterized by assigning pairs of mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) to said channels (CH1, CH2).

19. A method according to any one of the preceding Claims, characterized by specifying said output power demand (P) separately for each channel (CH1, CH2) in the list of channels held by the base station (BS).

20. A method of assigning mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) to multi-user channels (CH1, CH2) in a mobile radio communications system in the transmission of packet data, wherein mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) are assigned to channels (CH1, CH2) for transmitting information between a base station (1000) and the mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) including a control unit (1030), characterized in that mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) in the vicinity of the base station (1000) are assigned channels (CH1, CH2) in accordance with determined parameters (P, T, A) for said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) such as to minimize the total energy transmitted from the base station (1000) in the transmission of information from said base station (1000) to said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2).

21. A method according to Claim 20, characterized each of said channels (CH1, CH2) includes an uplink for transmitting information from a mobile station to a base station and a downlink for transmitting information from the base station to a mobile station, in that there are generated state flags (USF) which for each channel (CH1, CH2) within the list of channels held by the base station (1000) indicate with each time frame (TDMA frame) that mobile station (MS1, MS2) which is authorized to send information to the base station (1000).

22. A method according to Claim 21, characterized by storing the parameter values (MS<sub>i</sub>(P,T,A)) of said parameters (P, T, A) for respective mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2); and by storing the assignment of mobile

stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) to respective channels ( $CH_j(MS)$ ).

23. A method according to Claim 22, characterized by specifying the time points ( $\tau_1$ ) at which said assignment of 5 mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) shall take place.

24. An arrangement for assigning multi-user channels (CH1, CH2) to mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) in a mobile radio communications system for transmission of 10 packet data, wherein mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) are assigned channels (CH1, CH2) for transmitting information between a base station (1000) and the mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) including a control unit (1030), characterized in that on 15 the basis of parameters (P, T, A) determined for mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) in the vicinity of the base station (1000), the control unit (1030) assigns the mobile stations (MS1-MS4, MSX1-MSX3, MSY1, MSY2) to channels (CH1, CH2) such as to minimize the total energy transmitted 20 from the base station (1000) in the transmission of information from said base station (1000) to said mobile stations (MS1-MS4, MSX1-MSX3, MSY1, M SY2).

25. An arrangement according to Claim 21, characterized in that each of said channels (CH1, CH2) includes an uplink for 25 transmitting information from a mobile station to a base station, and a downlink for transmitting information from the base station to a mobile station; in that there are generated state flags (USF) which for each channel (CH1, CH2) within the channel set-up of the base station (1000)

indicate per time frame (TDMA frame) that mobile station (MS<sub>1</sub>, MS<sub>2</sub>) that is authorized to send information to the base station (1000) including a control unit (1030); and in that said control unit (1030) generates said state flags  
5 (USF).

26. An arrangement according to Claim 25, characterized in that said control unit (1030) includes a processor unit (1040) for processing the parameter values (MS<sub>i</sub>(P,T,A)) of said parameters (P, T, A), and at least one storage unit  
10 (1050, 1060) for registering said parameter values (MS<sub>i</sub>(P,T,A)) for respective mobile stations and storing mobile stations (MS<sub>1</sub>-MS<sub>4</sub>, MSX<sub>1</sub>-MSX<sub>3</sub>, MSY<sub>1</sub>, MSY<sub>2</sub>) assigned to respective channels (CH<sub>j</sub>(MS)).

27. An arrangement according to Claim 26, characterized in  
15 that the control unit (1030) also includes a timer unit (1070) for indicating time points at which said assignment of mobile stations (MS<sub>1</sub>-MS<sub>4</sub>, MSX<sub>1</sub>-MSX<sub>3</sub>, MSY<sub>1</sub>, MSY<sub>2</sub>) shall take place; in that said time unit (1070) is set to zero by a first signal (R) said processor unit (1040); and in that  
20 after a given time ( $\tau$ ), said time unit (1070) delivers a second signal (U) which causes said control unit (1030) to update said assignment.



1/6

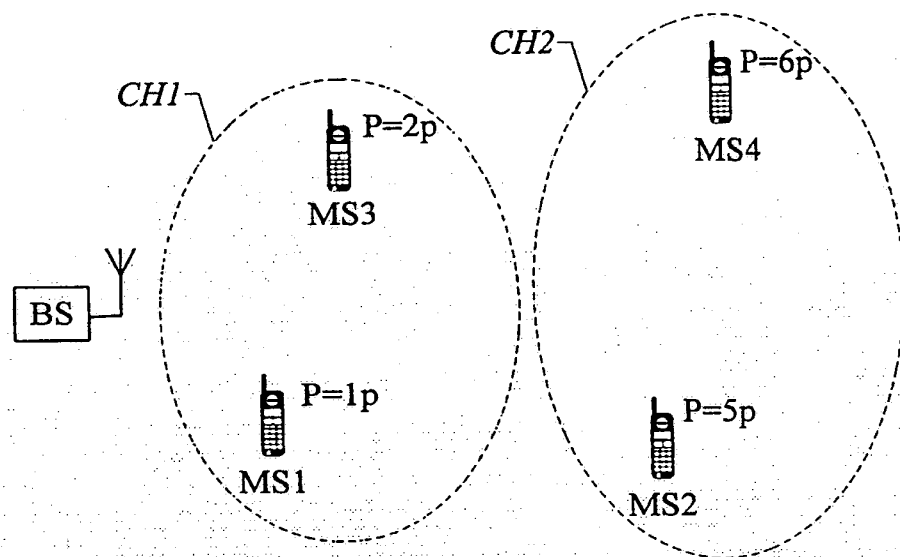


Fig. 1

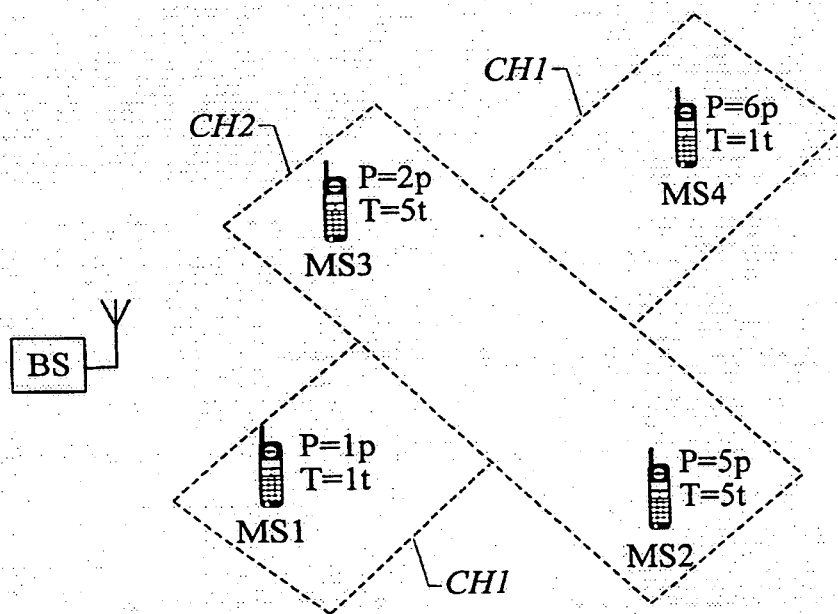


Fig.2

2/6

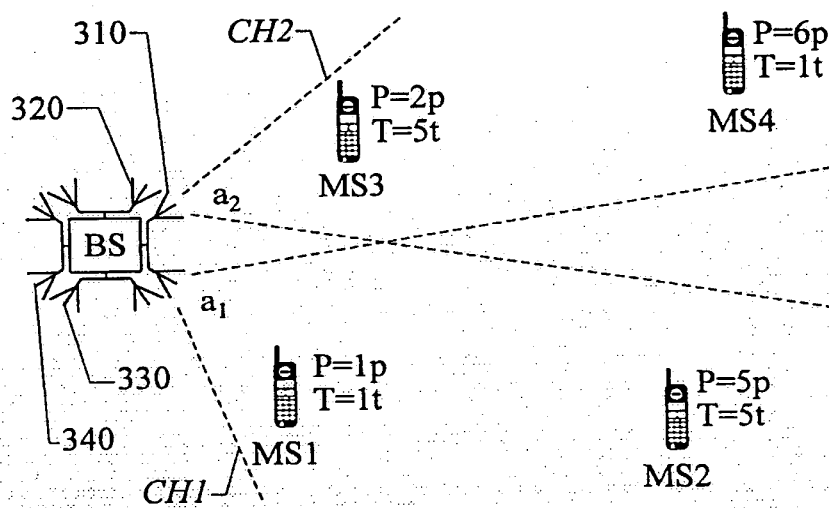


Fig. 3

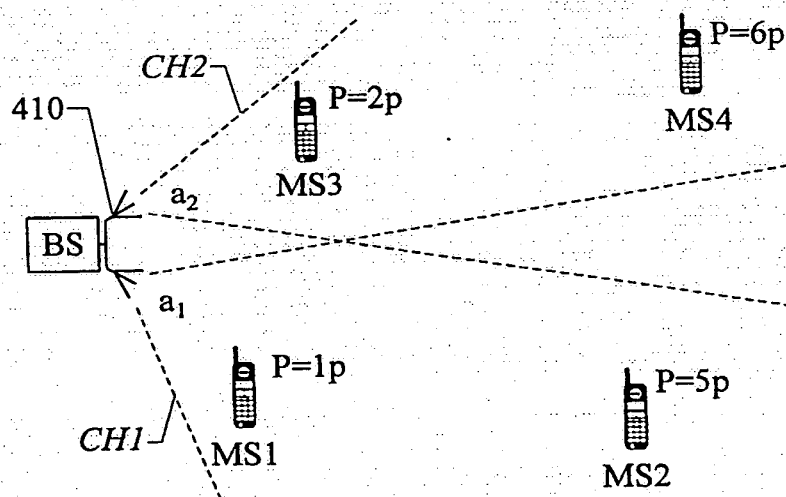


Fig. 4

3/6

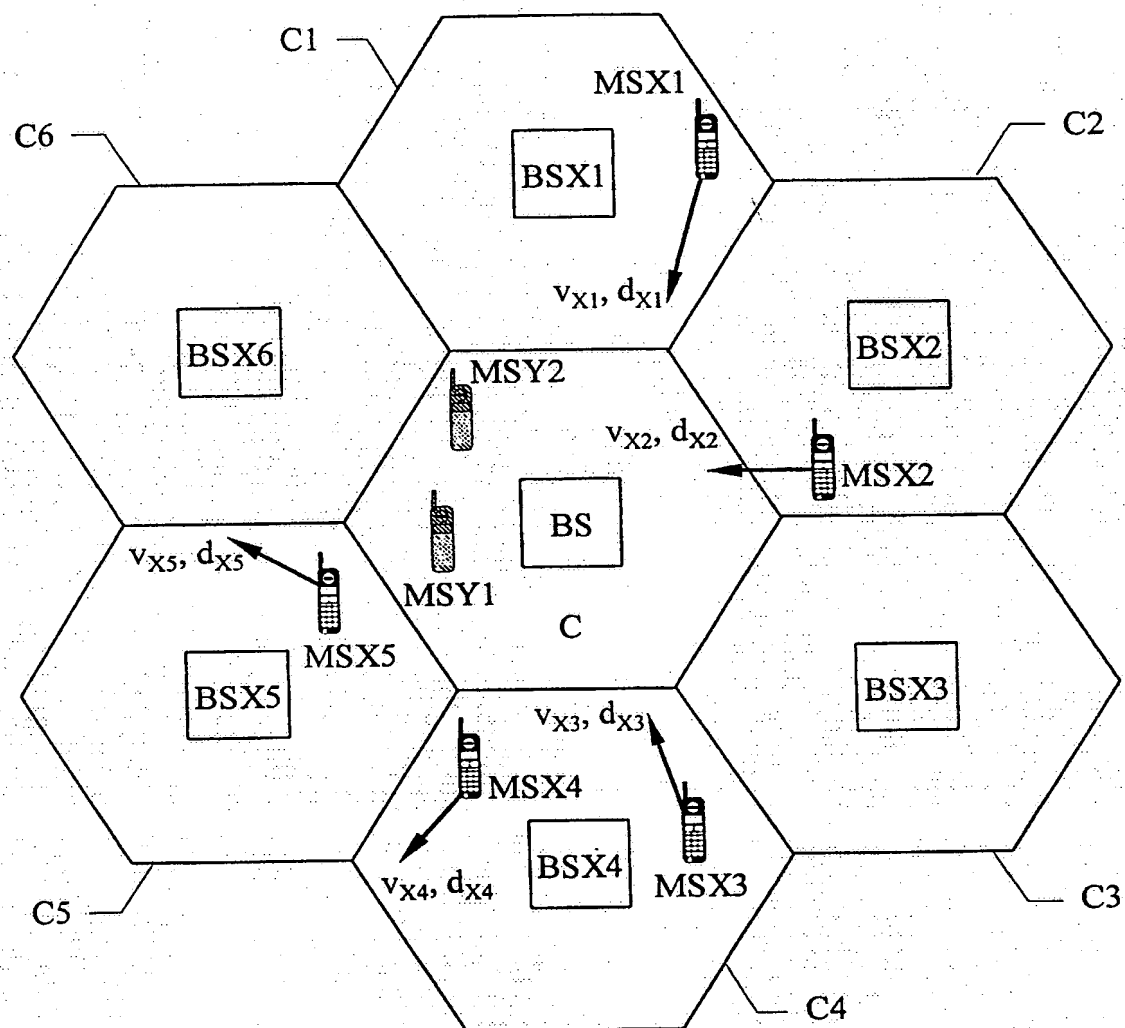


Fig. 5

4/6

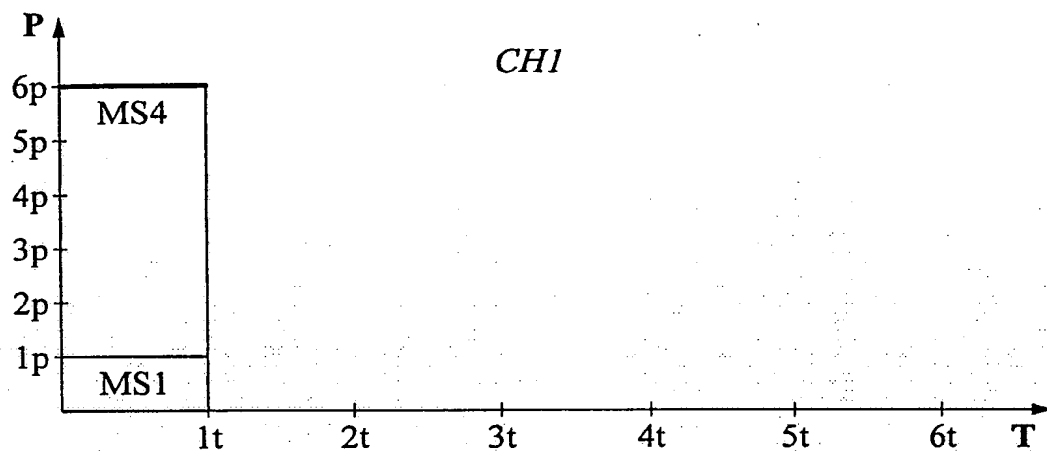


Fig. 6a

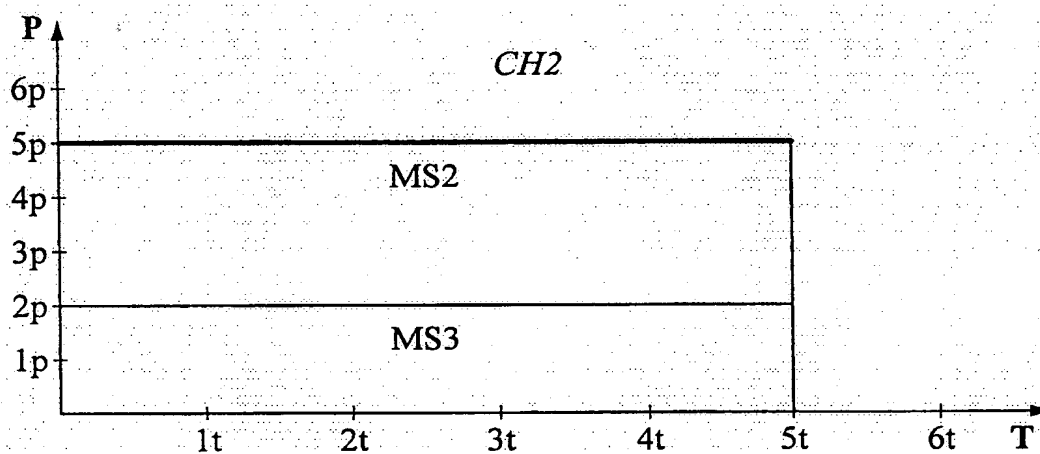


Fig. 6b

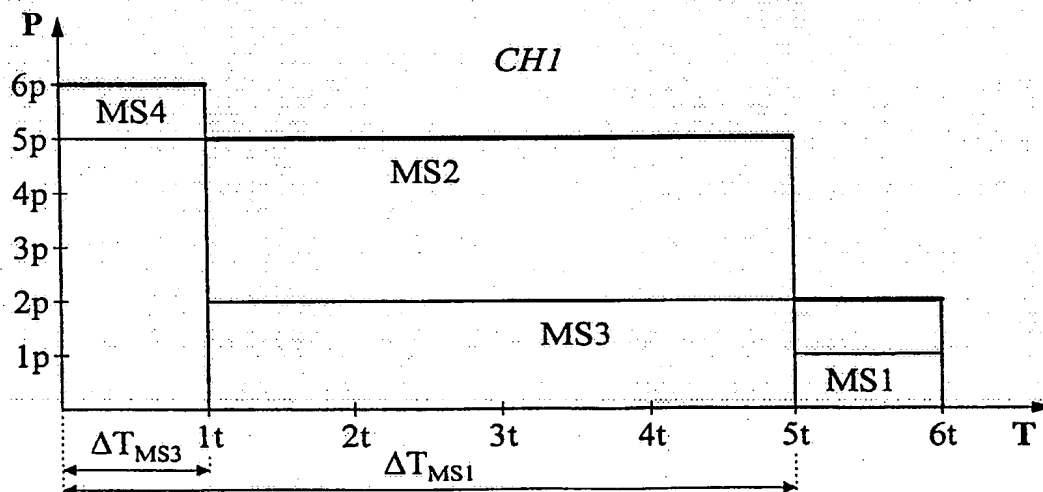


Fig. 7

5/6

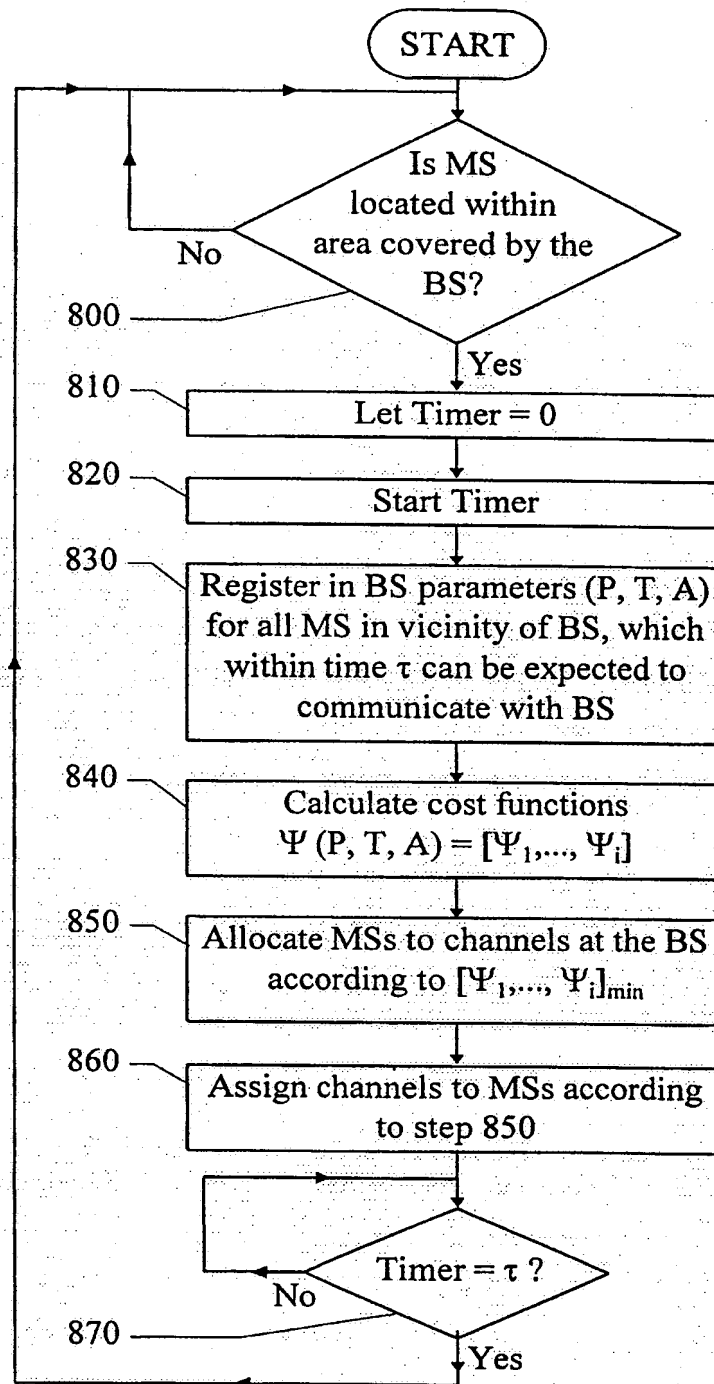


Fig. 8

<i>TDMA-ram</i>	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
CH1																																
DL																																
USF																																
UL																																

Fig. 9

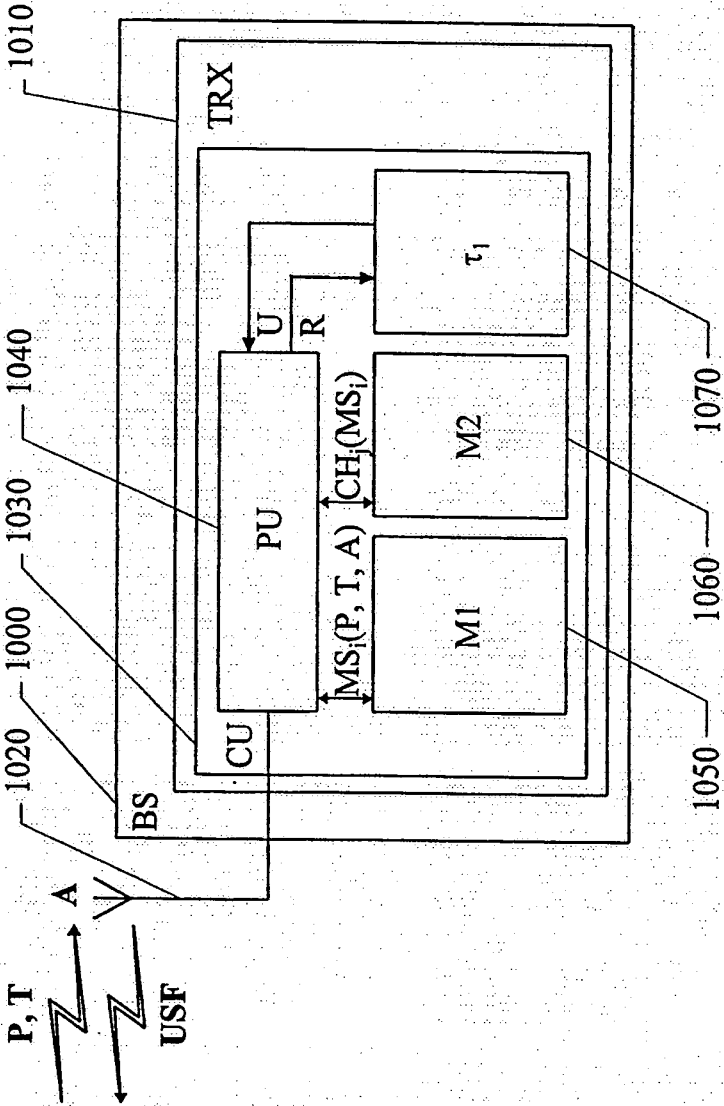


Fig. 10

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 98/00017

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5579306 A (P.W. DENT), 26 November 1996 (26.11.96), column 4, line 3 - line 49, figure 3, abstract  --	1-11,13, 15-20,24
A	US 5530917 A (C.H. ANDERSSON ET AL), 25 June 1996 (25.06.96), column 2, line 8 - line 9; column 3, line 35 - line 42; column 7, line 38 - column 8, line 3, figure 2, abstract, column 12, line 13 - line 22; column 13, line 23 - line 27; column 14, line 8 - line 14  --	3-7
A	WO 9101073 A1 (TELECOM SECURIOR CELLULAR RADIO LIMITED), 24 January 1991 (24.01.91), page 7 - page 8, abstract  --	10-11,13

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

9 July 1998

Date of mailing of the international search report

1998-07-14

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Per Källquist  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/00017

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9410767 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 11 May 1994 (11.05.94), page 5, line 3 - line 13, abstract  -- -----	21,25



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

30/06/98

International application No.  
PCT/SE 98/00017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5579306 A	26/11/96	AU 3495295 A BR 9508662 A CA 2198458 A CN 1157087 A EP 0779012 A FI 970853 A JP 10505206 T WO 9607287 A	22/03/96 11/11/97 07/03/96 13/08/97 18/06/97 03/03/97 19/05/98 07/03/96
US 5530917 A	25/06/96	AU 674756 B AU 6809994 A CN 1109702 A EP 0650649 A FI 950159 A SE 500830 C SE 9301695 A SG 43773 A WO 9427384 A	09/01/97 12/12/94 04/10/95 03/05/95 13/01/95 12/09/94 12/09/94 14/11/97 24/11/94
WO 9101073 A1	24/01/91	AT 136187 T DE 69026257 D,T DK 482050 T EP 0482050 A,B SE 0482050 T3 ES 2088429 T FI 920107 D	15/04/96 31/10/96 29/07/96 29/04/92 16/08/96 00/00/00
WO 9410767 A1	11/05/94	AU 667998 B AU 678919 B AU 4070695 A AU 5379594 A BR 9305692 A CN 1088378 A EP 0623263 A FI 943052 A JP 7502874 T MX 9306347 A NZ 257411 A NZ 280819 A SE 500565 C SE 9203127 A SG 43757 A US 5420864 A	18/04/96 12/06/97 04/04/96 24/05/94 24/12/96 22/06/94 09/11/94 23/06/94 23/03/95 29/04/94 24/02/97 24/02/97 18/07/94 27/04/94 14/11/97 30/05/95